7-Port USB2.0/FireWire Combo Hub

TFU-430

This 7-Port USB 2.0/FireWire Combo Hub provides four USB 2.0 ports and three IEEE 1394 FireWire ports to your USB/FireWire-Enabled Desktop or Laptop PC.

FEATURES

- Compliant with USB 2.0, USB 1.1 and FireWire IEEE 1394 Specifications
- Supports USB High-Speed Transfer Rate up to 480 Mbps
- Supports IEEE 1394 Transfer Rate up to 400Mbps
- Supports USB Over-Current Detection and Individual/Gang Power Control
- High Speed Detection Indicator Output
- Supports Multiple tiers with up to 127 USB Devices and up to 63 FireWire Devices
- Compliant with Windows 98SE/ME/2000/XP/Vista
- Supports Bus-Power or Cable-Power with Power Adapter
- Compatible with USB 2.0/1.1 and FireWire enabled Pcs
- Supports Plug & Play and Easy Installation
- 2-Year Warranty

7-Port USB2.0/FireWire Combo Hub
TFU-430

SPECIFICATIONS

Hardware	
Interfaces	• USB 2.0 and FireWire
Standards	• USB 2.0, 1.1 and FireWire IEEE 1394
Port	• 1 x USB 2.0 Type B Port (Uplink) • 4 x USB 2.0 Type A Ports • 3 x FireWire Ports
Driver Compliant	• Windows 98SE/ME/2000/XP/Vista • Mac OS 8.6/9.x/10.x
LEDs	• Power : USB & FireWire • USB : Link Activity
Dimension (LxWxH)	• 106.5 x 63 x 41.5mm (4.2 x 2.48 x 1.6 inches)
Weight	• 145g (3.2lb)
Power Adapter (Switching)	• Input: 100~240V ~ 50/60Hz • Output: 12V DC, 2.5A
Power Consumption	• 500mA (max)
Temperature	• Operating: 0°~ 40°C (32°~ 104°F) • Storage: -10°~ 45°C (14°~ 113°F)
Humidity	• 85% (Non-Condensing)
Certifications	• FCC, CE

NETWORKING SOLUTIONS

7-Port USB 2.0/FireWire Combo Hub
(TFU-430)

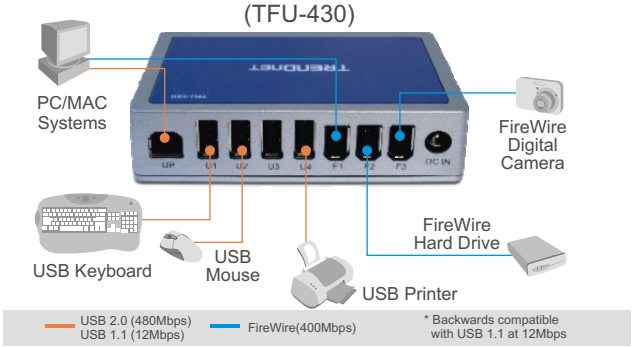

* One FireWire Port is reserved for uplink use.

RELATED PRODUCTS

TMR-61U2	USB 2.0 All-in-1 Memory Card Reader/Writer
TU2-ET100	USB 2.0 to 10/100Mbps Fast Ethernet Adapter
TU2-ET200	USB 2.0 Mobile Docking Station

ORDERING INFORMATION

TRENDnet®
20675 Manhattan Place,Torrance, CA 90501 USA
Tel: 1-310-961-5500
Fax: 1-310-961-5511
Web: www.trendnet.com
Email: sales@trendnet.com

To Order Please Call:
1-888-326-6061

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com.
Copyright © TRENDnet. All Rights Reserved.